

CHT CVT

400°C/2h centrifugal roof fans with horizontal or vertical outlet air

CHT: 400°C/2h centrifugal roof fans with horizontal outlet air, hood in aluminium

CVT: 400°C/2h centrifugal roof fans with vertical outlet air, hood in aluminium



CHT



CVT

Fan:

- Galvanised sheet steel base plate.
- Impeller with backward-curved blades made from galvanised sheet steel
- Bird guard
- Aluminium rain deflector hood
- Approval according to Standard EN-12101-3-2002, certificate no.: 0370-CPD-0897

Motor:

- Class F motors, with ball bearings and IP55 protection, except single-phase versions, IP54 protection, one- or two-speed depending on the model
- Single-phase 230V.-50Hz., and three-phase 230/400V.-50Hz.
- Max. temperature of air for transport: -25°C.+ 120°C.

Finish:

- Anticorrosive galvanized sheet steel and aluminium


On request:

- Special windings for different voltages,
- ATEX certification, Category 3



Brackets that aid mounting on the roof

Order code

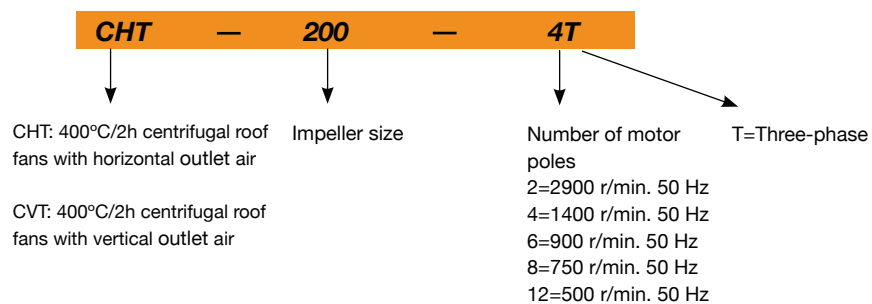

Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)		Power installed (kW)	Airflow maximum (m³/h)	Sound level dB(A)		Approx. weight (Kg)
		230V	400V (A)			Inlet	Outlet	
CHT CVT 200-4T	1350	1.45	0.84	0.25	1450	37	43	25
CHT CVT 200-4M	1380	0.65		0.25	1450	37	43	25
CHT CVT 225-4T	1350	1.45	0.84	0.25	2100	41	47	25
CHT CVT 225-4M	1380	0.95		0.25	2100	41	47	25
CHT CVT 225-6T	900	1.51	0.87	0.25	1400	30	36	26
CHT CVT 225-6M	890	0.50		0.25	1400	30	36	26
CHT CVT 250-4T	1350	1.45	0.84	0.25	3100	45	50	34
CHT CVT 250-4M	1380	1.35		0.25	3100	45	50	34
CHT CVT 250-6T	900	1.51	0.87	0.25	2000	33	40	35
CHT CVT 250-6M	890	0.65		0.25	2000	33	40	35
CHT CVT 315-4T	1370	2.74	1.58	0.55	4950	48	54	39
CHT CVT 315-4/8T	1435 / 715		1.60 / 0.60	0.55 / 0.09	4950 / 2475	48 / 33	54 / 39	40
CHT CVT 315-4M	1380	3.30		0.55	4950	48	54	39
CHT CVT 315-6T	900	2.13	1.23	0.37	3200	37	43	39
CHT CVT 315-6M	910	0.95		0.37	3200	37	43	39
CHT CVT 400-4T	1380	3.34	1.93	0.75	7000	55	61	57
CHT CVT 400-4/8T	1425 / 710		2.30 / 0.90	0.75 / 0.12	7000 / 3500	55 / 40	61 / 46	58
CHT CVT 400-4M	1380	4.40		0.75	7000	55	61	57
CHT CVT 400-6T	900	2.13	1.23	0.37	4500	44	50	56
CHT CVT 400-6M	910	1.80		0.37	4500	44	50	56
CHT CVT 450-4T	1400	5.97	3.45	1.50	10200	59	64	66
CHT CVT 450-4/8T	1420 / 700		3.50 / 1.50	1.50 / 0.37	10200 / 5100	59 / 43	64 / 49	66
CHT CVT 450-6T	900	2.13	1.23	0.37	6900	47	54	59
CHT CVT 450-6/12T	930 / 450		1.60 / 0.65	0.55 / 0.09	6900 / 3450	47 / 32	54 / 39	63
CHT CVT 450-6M	910	2.00		0.37	6900	47	54	59
CHT CVT 500-6T	925	5.23	3.02	1.10	12000	51	57	103
CHT CVT 500-6/12T	950 / 470		3.00 / 1.15	1.10 / 0.18	12000 / 6000	51 / 36	57 / 42	110
CHT CVT 500-8T	680	3.21	1.85	0.55	8900	44	50	103
CHT CVT 560-6T	955	9.28	5.36	2.20	17300	54	61	126
CHT CVT 560-6/12T	940 / 470		5.60 / 2.20	2.20 / 0.37	17300 / 8650	54 / 39	61 / 46	120
CHT CVT 560-8T	710	5.54	3.20	1.10	12900	46	53	110
CHT CVT 630-6T	960	16.35	9.44	4.00	24700	58	64	166
CHT CVT 630-6/12T	970 / 480		11.00 / 4.00	4.00 / 0.65	24700 / 12350	58 / 43	64 / 49	161
CHT CVT 630-8T	710	7.45	4.30	1.50	18400	50	57	148

(1) The sound level values are measurements of pressure in dB(A) at a distance of 6 m and at 2/3 of the maximum airflow (2/3 Qmax.)

Acoustic features

The specified values are determined according to free field measurements of pressure and sound levels in dB(A) at a distance of 6 m.

Sound power Lw(A) spectrum in dB(A) via frequency band in Hz.


Values taken at the inlet with 2/3 of the maximum airflow (2/3Qmax).								Values taken at outlet with 2/3 of the maximum airflow (2/3Qmax).									
Model	63	125	250	500	1000	2000	4000	8000	Model	63	125	250	500	1000	2000	4000	8000
200	35	41	52	55	56	52	50	44	200	39	44	58	60	61	61	56	51
225-4	42	51	56	56	60	59	52	46	225-4	41	50	60	64	67	64	57	51
225-6	31	40	45	45	49	48	41	35	225-6	30	39	49	53	56	53	46	40
250-4	46	55	60	60	64	63	56	50	250-4	44	53	63	67	70	67	60	54
250-6	34	43	48	48	52	51	44	38	250-6	34	43	53	57	60	57	50	44
315-4	50	56	62	62	65	68	59	53	315-4	49	61	69	71	72	72	64	56
315-6	39	45	51	51	54	57	48	42	315-6	38	50	58	60	61	61	53	45
315-8	35	41	47	47	50	53	44	38	315-8	34	46	54	56	57	57	49	41
400-4	57	63	69	69	72	75	66	60	400-4	56	68	76	78	79	79	71	63
400-6	46	52	58	58	61	64	55	49	400-6	45	57	65	67	68	68	60	52
400-8	42	48	54	54	57	60	51	45	400-8	41	53	61	63	64	64	56	48
450-4	62	69	74	74	78	77	70	65	450-4	60	72	80	82	83	80	73	65
450-6	50	57	62	62	66	65	58	53	450-6	50	62	70	72	73	70	63	55
450-8	46	53	58	58	62	61	54	49	450-8	45	57	65	67	68	65	58	50
450-12	35	42	47	47	51	50	43	38	450-12	35	47	55	57	58	55	48	40
500-6	54	60	65	66	70	69	62	55	500-6	50	64	72	76	75	72	66	60
500-8	47	53	58	59	63	62	55	48	500-8	43	57	65	69	68	65	59	53
500-12	39	45	50	51	55	54	47	40	500-12	35	49	57	61	60	57	51	45
560-6	57	63	68	69	73	72	65	58	560-6	54	68	76	80	79	76	70	64
560-8	49	55	60	61	65	64	57	50	560-8	46	60	68	72	71	68	62	56
560-12	42	48	53	54	58	57	50	43	560-12	39	53	61	65	64	61	55	49
630-6	61	67	72	73	77	76	69	62	630-6	57	71	79	83	72	79	73	67
630-8	53	59	64	65	69	68	61	54	630-8	50	64	72	76	72	72	66	60
630-12	46	52	57	58	62	61	54	47	630-12	42	56	64	68	67	64	58	52

To obtain the Lwa sound power spectra in dB(A) at the inlet with the maximum airflow (Qmax), add the values in the following tables to the LpA sound pressure level given on the characteristic curves:

Frequency band in Hz	63	125	250	500	1000	2000	4000	8000
	2	9	15	15	18	18	11	5

Dimensions in mm


CHT Model

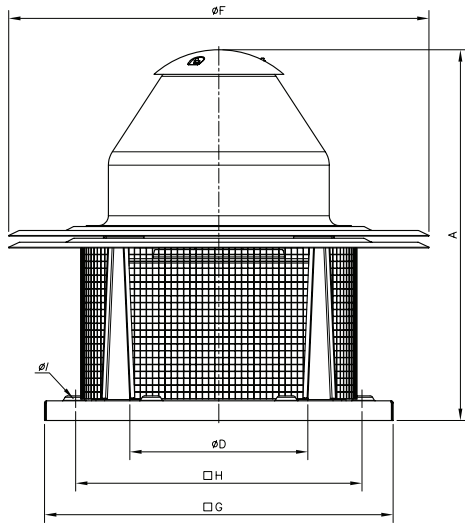

Model	A	øD*	øF	G	H	øl
CHT-200	552	250	570	450	360	12
CHT-225	570	250	570	450	360	12
CHT-250	632	355	726	560	450	12
CHT-315	682	355	726	560	450	12
CHT-400	755	500	856	710	590	12
CHT-450	770	500	856	710	590	12
CHT-500	846	630	1075	900	750	14
CHT-560	1035	710	1300	1100	900	14
CHT-630	1098	710	1300	1100	900	14

(*) Recommended nominal diameter for duct.

CVT Model


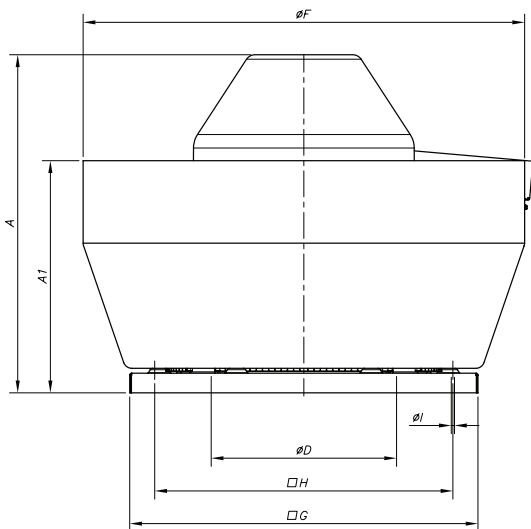


Model	A	A1	øD*	øF	G	H	øl
CVT-200	500	308	250	530	450	360	12
CVT-225	517	308	250	530	450	360	12
CVT-250	580	380	355	705	560	450	12
CVT-315	630	380	355	705	560	450	12
CVT-400	690	475	500	900	710	590	12
CVT-450	705	475	500	900	710	590	12
CVT-500	775	545	630	1100	900	750	14
CVT-560	956	676	710	1295	1100	900	14
CVT-630	1017	676	710	1295	1100	900	14

(*) Recommended nominal diameter for duct.

Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.
 Pe = Static pressure in mm.w.c., Pa and inwg.
 The Lp (dB(A)) sound levels given on the curves are free field pressure measurements at 6 metres at the inlet.

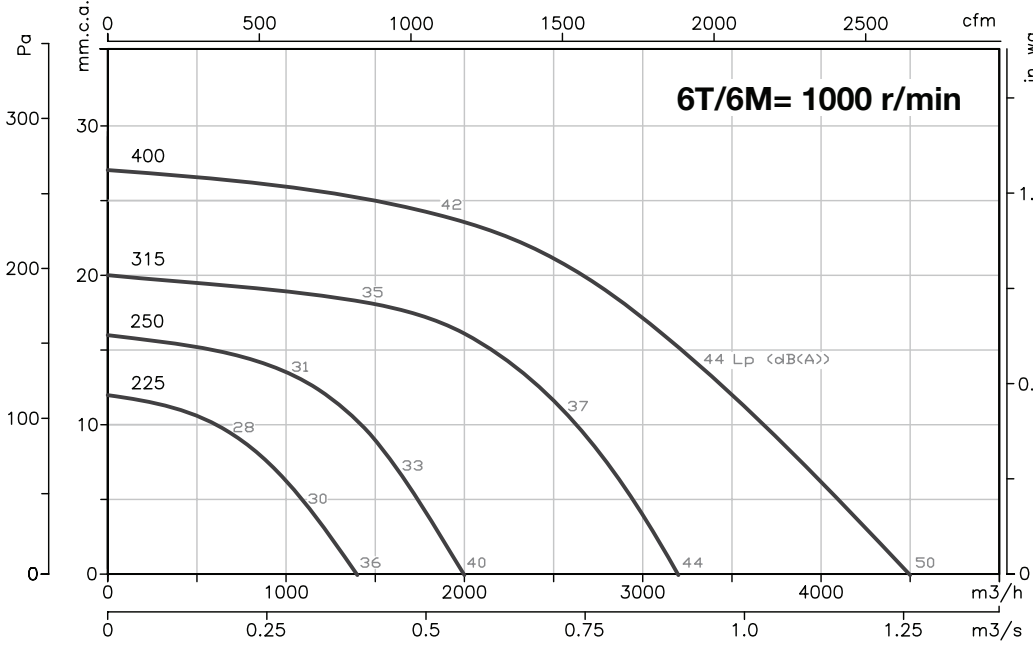
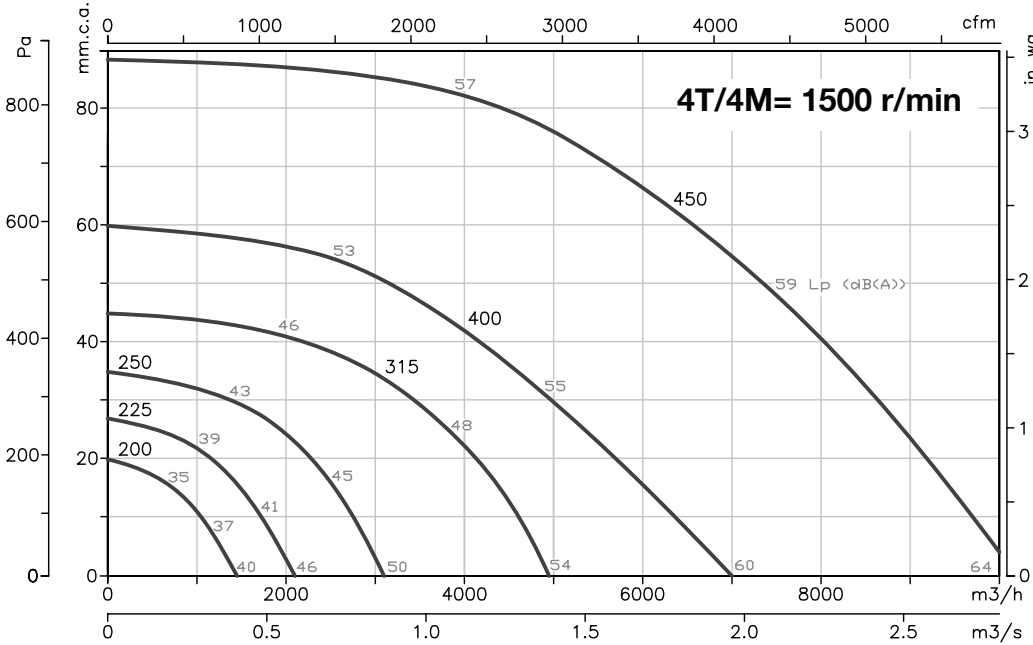


Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.


Pe= Static pressure in mm.w.c., Pa and inwg.

The Lp (dB(A)) sound levels given on the curves are free field pressure measurements at 6 metres at the inlet.

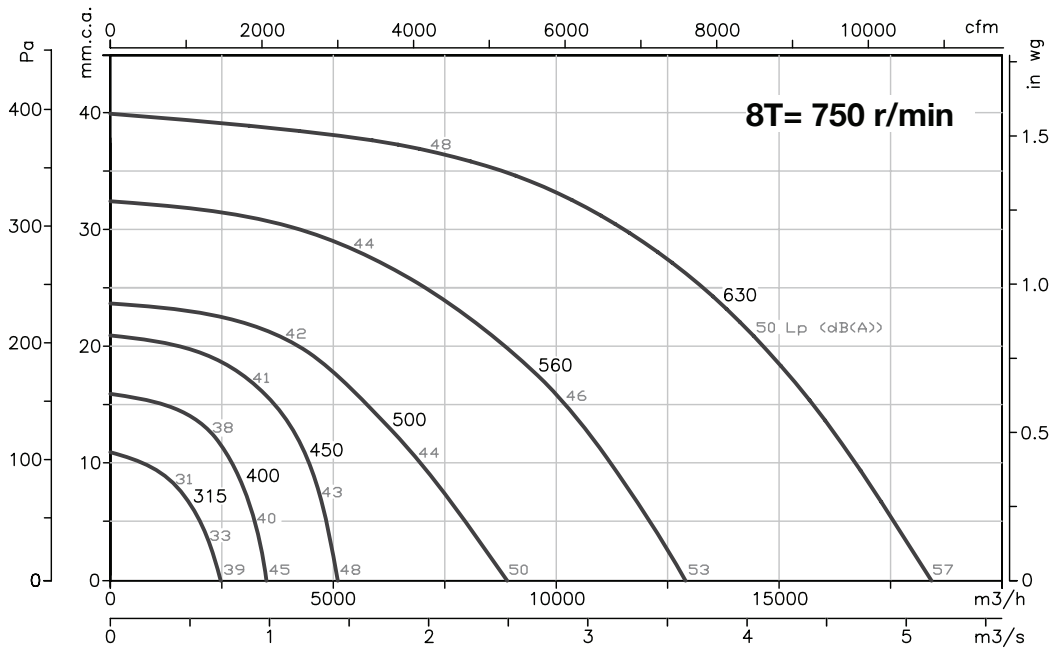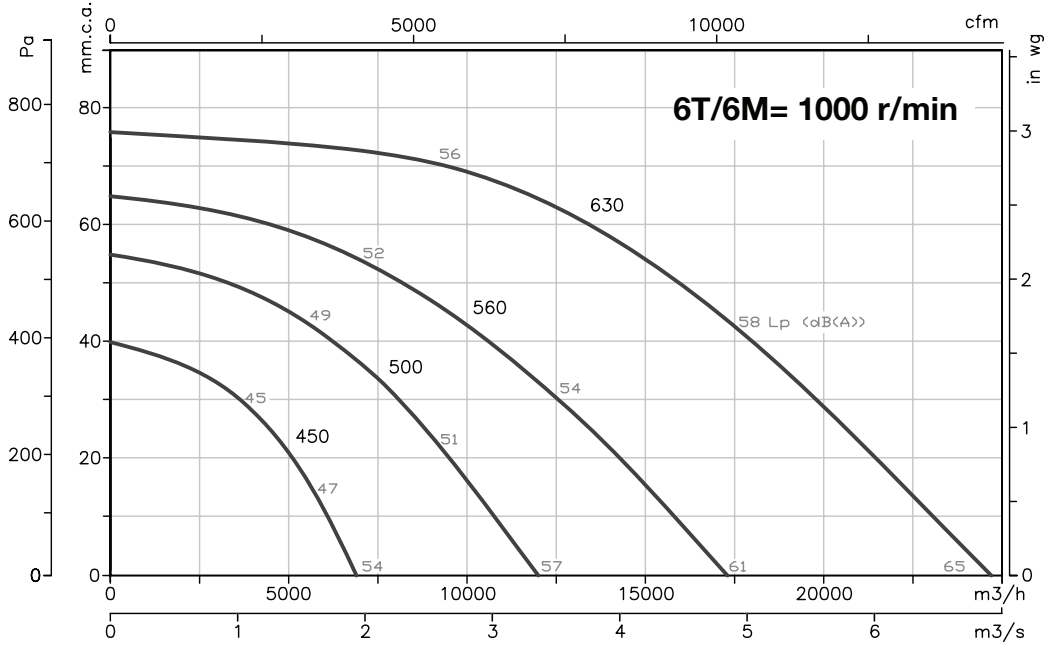


Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.
 Pe = Static pressure in mm.w.c., Pa and inwg.
 The Lp (dB(A)) sound levels given on the curves are free field pressure measurements at 6 metres at the inlet.

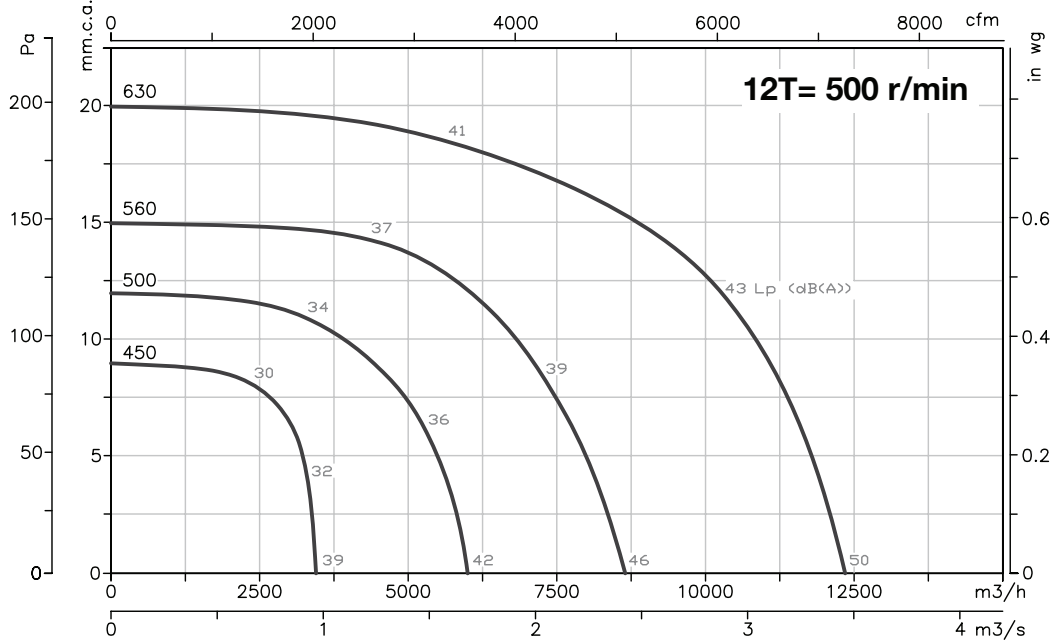


Variation of sound pressure depending on distance

The sound level may vary depending on the roof structure.

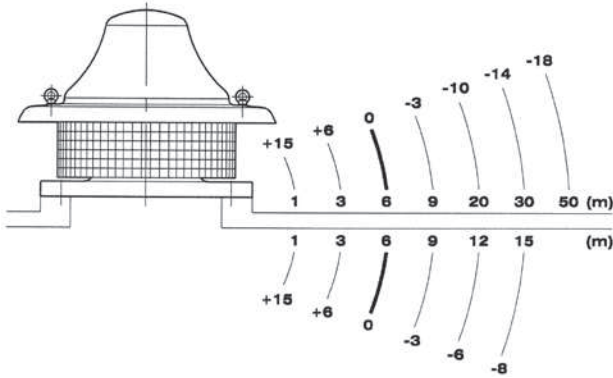

Example of use

Fans suitable for use in industrial kitchens.
 For the correct application of the standard:
 • C.T.E. Technical Building Code Basic SI Document for fire safety
 Basic HS Document for health and safety

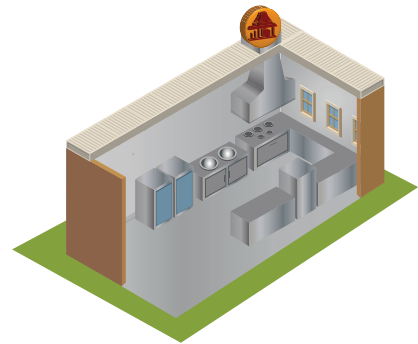

Accessories

See accessories section

